

## FIILEX P100 Brick Gen 2

Varenummer: FLXP101-Z



**1,396.00**

DKK ex moms

**Fiilex**

**1,745.00**

DKK incl moms

### Produkteksperter:



Ronni Jaqué

[ronni@goecker.dk](mailto:ronni@goecker.dk)

35865107

København



Henrik Duus Preuss

[henrik@goecker.dk](mailto:henrik@goecker.dk)

35865108

København

### Kampagne:

Den pris du ser her i webshoppen er allerede nedsat med den procentsats som flaget på varen viser. Der gives derfor ikke yderligere rabat på varen. Den pris du ser, er den pris varen sælges til. Den nedsatte pris er kun gældende så længe lager haves, dvs. så længe lager status er grøn (bold). Bestiller du én udsolgt udsalgsvare (rød lager status/bold) annulleres ordren automatisk af os, og vi tilbagefører eventuel kort indbetaling. Da der ikke altid er billeder eller tekstbeskrivelse på alle udsalgsvare her i webshoppen, er du altid velkommen til at kontakte os på telefon 35821100 hvis du har spørgsmål til varen.

# Goecker for shooters


## Beskrivelse:

The highly compact P100 is the most versatile solution for someone who is constantly on the move and lighting in unconventional locations. Fully dimmable and color-tunable to match daylight or tungsten, this brilliant LED features a spot-to-flood lens and runs off an integrated Li-ion battery. Easily modifiable, "The Brick" puts out 100W of high CRI (>90) light that can serve as either key or fill and will translate all your colors precisely. Revolutionize the way you light with the P100's flat form factor - place it on almost any surface, mount it on your camera, use it in a three-point set, or simply hold it in your hand. With no bulbs to break and no cords to plug in, go anywhere knowing that you'll be able to light your shots quickly and beautifully.

## FEATURES

- 100W Output - 12W Draw
- Weighs 0.59lbs
- Dimmable and Color Tunable Between 3000K to 5600K
- High CRI (Color Rendering Index) >92
- Runs on Integrated Li-ion battery or AC power
- 2 + Hour Battery Life at Maximum Power
- Small Form Factor - Place Almost Anywhere
- Solid State Technology (No Broken Bulbs)
- Compatible with Magnetic Accessories (Use With Accessory Mount)

## SPECTRAL DATA

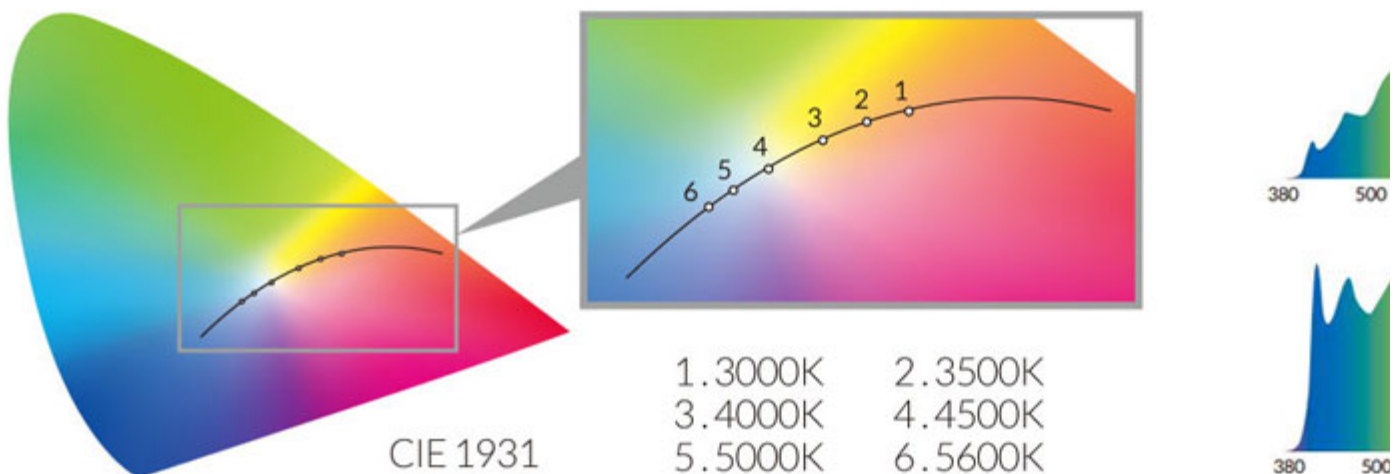

CRI Measurement	R1	R2	R3	R4	R5	R6	R7	R8	R9
3000K	93	97	97	93	93	94	97	93	85
5600K	96	95	95	95	96	95	96	93	82

CRI Measurement	R10	R11	R12	R13	R14	R15	CRI Ra	CRI Extended	TLCI Results
3000K	95	90	92	93	97	93	94	93	99
5600K	89	96	90	95	97	93	95	93	98

## SPECIFICATIONS

Size	5.8" (Length) x 2.8" (Width) x 2.8" (Height)
Weight (Include Yoke)	0.59 lb / 0.27 kg
LED	Dense Matrix LED
Thermal Design	Passive Cooling System (without fan)
CCT Range	Continuous from 3000K to 5600K

# Goecker for shooters

Dimming	100 - 10%
CRI	>92
Power Consumption	12W Max.
Input	9 to 13 V DC
AC Adaptor	100-240V AC, 50-60Hz (In) / 12.6V DC , 12W (Out)
Battery	Li-ion/Rechargeable Battery/11.1V 2600mAh/29Whh
Operating Temperature	0 - 40° C / 32° - 104°F

# Goecker for shooters

## Specifikationer:

Producent	Fiilex
Kategori	LED lys
CRI	92
Strøm/batteri	Runs on Integrated Li-ion battery or AC power
Lysstyrke	100W
Vægt	270
Farvetemperatur	Justerbar fra 5600K til 3000K